


Smooth Marbelized Military-Grade Switchboard Mats

Specification Sheet

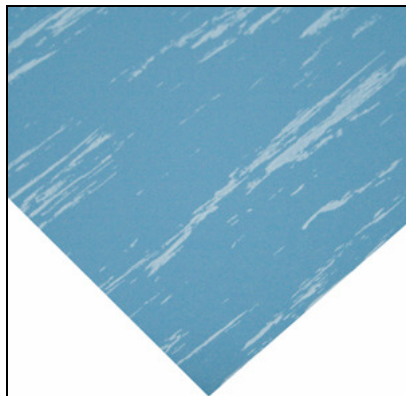

Performance	Best
Uses	Around electronic and high-voltage apparatus
Compound	1/8" Vinyl
Military Specs	MIL-DTL-15562G, Type I, Smooth, Marbelized
Dielectric Strength	30,000 Volts
Coefficient of Friction	0.79 Dry
Tabor Abrasion	1% lost @ 1,000 cycles
Flammability	Mil. 15562-F FMVSS 302: PASS
Accelerated Aging	ASTM D573-88: 90% of original
Elongation	ASTM D412-98a Die C: 250%
Electric Proof Test	ASTM D178-01 (Minimum 20,000 V - 1 min): PASS
Tensile Strength	ASTM D412-98a Die C: 500 psi
Temperature Range	ASTM D1056: -20 to 160 °F
Ozone Resistance	ASTM D 1149, Method A: PASS
Warranty	1 years
Wear Resistance	★★★★★
Slip Resistance	★★★★★
Insulative Level	★★★★★